

Part Number: 110-5160-30

Model Number: MR-60X

Mobile Radio Interface Assembly



Used on These Radios:


Kenwood TK-5710/ 5720/ 5810/ 5820/ 5910

NX-700/ 800/ 900/ 5700/ 5800/ 5900

KRK-5DH/ 6DH/ 7DH/ 8DH

Notes:

- The Blue & Green wires on the MR-60X connect to an external speaker for the radio and provides RX audio input to the intercom.
- If no 9-pin connection is located or installed on the base of the radio, the Blue & Green unterminated wires must be spliced in from the 9-pin connector of the MR-60X to an external speaker source. The external speaker must be plugged into the 3.5MM speaker connection on the back of the radio to receive audio into the intercom. When a speaker plug is inserted into the 3.5MM jack on the radio it will disable the internal speaker. An actual speaker must be connected to also monitor radio traffic in the cab of the vehicle if the headsets are not being used temporarily. It is recommended that the mobile radio volume be kept at 50% to provide proper levels to intercom and external speaker from the speaker output.
- The radio's auxiliary port Pin 13 needs to be programmed for External PTT Voice through radio programming software.
- To avoid signal loss, the total length of MR cable plus extension accessory must not exceed 20 feet.

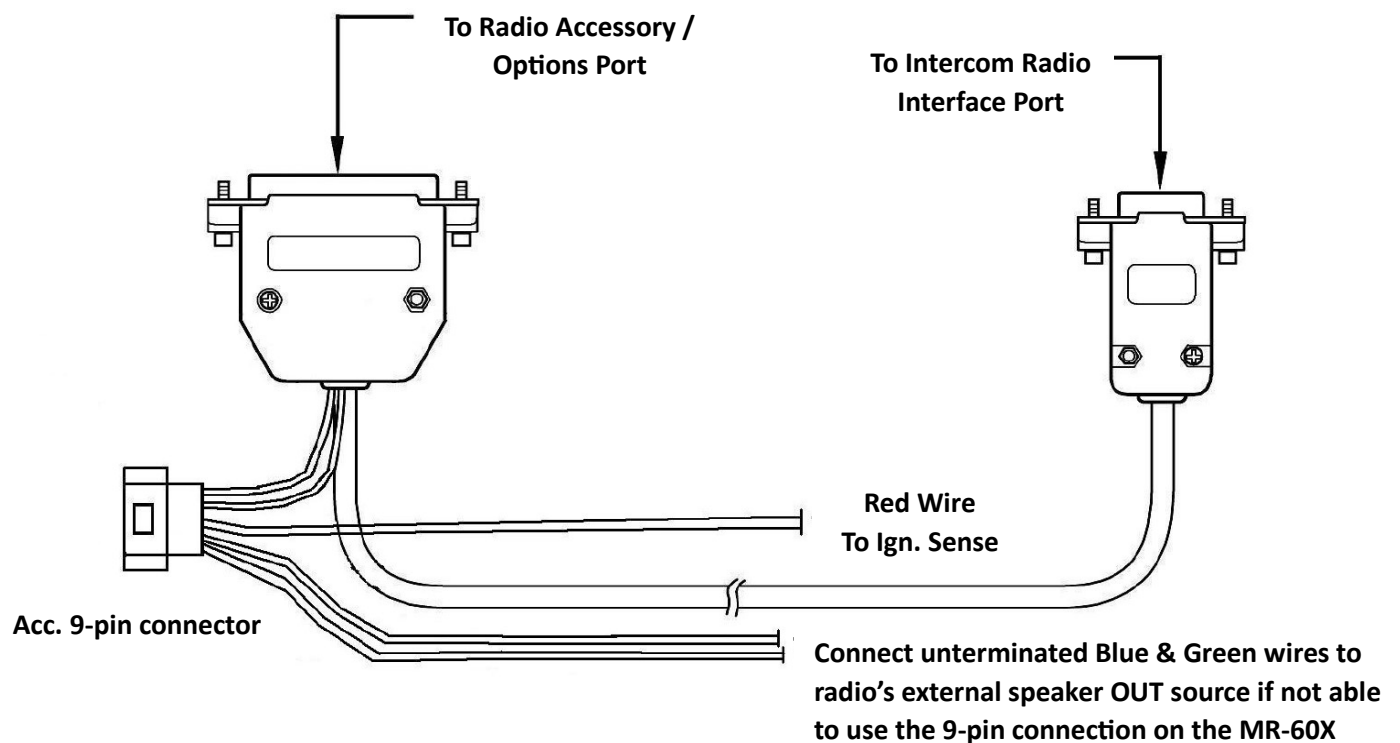

Wiring Diagram / Pin Assignments

